



5" CUP WHEELS

SASE® stocks a wide variety of 5" cup wheels excellent for concrete preparation and coatings removal. SASE® 5" cup wheels are used on the SASE® SC50 and other industry 5" hand grinders.



WET USE




DRY USE



PREP



REMOVAL

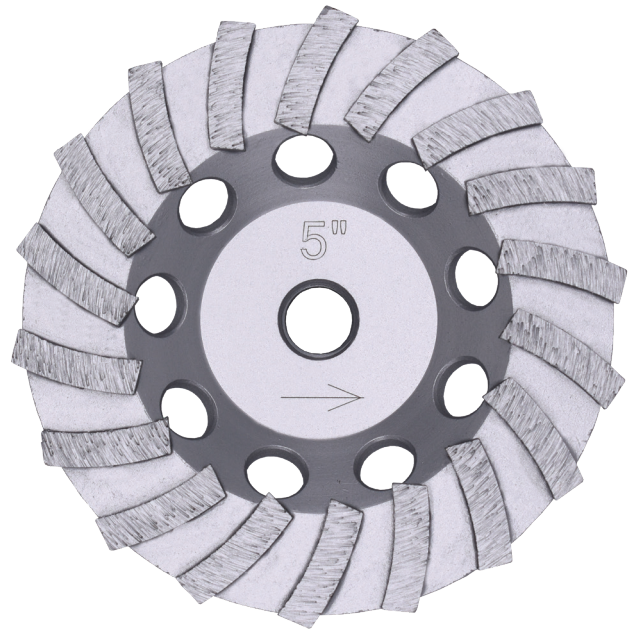

5" PCD WULF® SERIES

Removal of thick mil coatings and self levelers.

SC50.900612
(NON-THREADED)

SC50.900611
(THREADED)



5" T-SEGMENT

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC50.900609
(THREADED)



5" ARROW SEGMENT

Aggressive removal of thin to medium coatings.

SC50.900610
(THREADED)



5" DIAMOND CLUSTER - MEDIUM GRIT

Fast aggressive removal of paints, epoxies and glue coatings

SC50.900711
(THREADED)



5" 18-SEGMENT

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC50.900608
(THREADED)



5" S-SEGMENT TURBO - 25 GRIT

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC50.900620
(THREADED)



5" HYBRID FILLED COARSE

Ideal for light surface preparation or for polished concrete edge work to expose minimal aggregate, while leaving a smooth profile and blending edges.


SC50.900810
(THREADED)



5" HYBRID FILLED MEDIUM

Ideal for light surface preparation or for polished concrete edge work, leaving a smooth profile and blending edges.

SC50.900811
(THREADED)



5" HYBRID FILLED FINE

Ideal for polished concrete edge work, leaving a smooth profile and blending edges.

SC50.900812
(THREADED)