




METAL FLEX DIAMOND PADS

SASE® Metal Flex Diamond pads are ideal for removing mastics and sealers and also to profile edges without gouging the floor. The Metal Flex Diamond pads are available in three sizes: 3", 5" and 6".

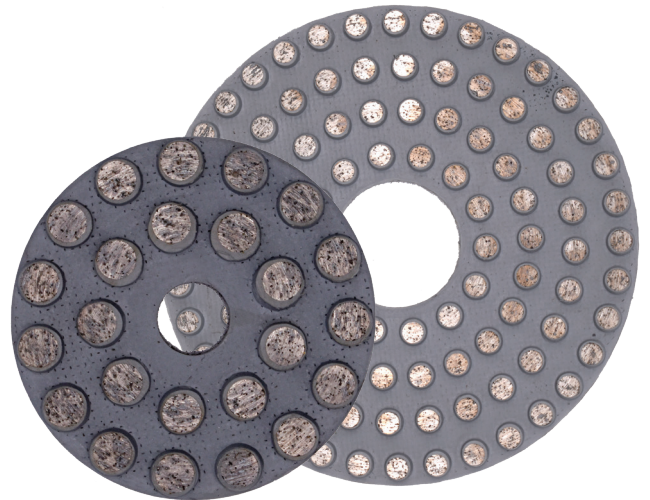

3" METAL FLEX DIAMOND PADS



SC30.500502

3" METAL FLEX DIAMOND PAD AQUA - 30 GRIT
Aggressive cutting with gouging.



SC30.500503

3" METAL FLEX DIAMOND PAD GREY - 50 GRIT
Ideal for removing sealers and as a first cut on new concrete.



SC30.500504

3" METAL FLEX DIAMOND PAD BLACK - 100 GRIT
Removes scratches left by 50 grit Metal Flex Diamond Pad.

5" METAL FLEX DIAMOND PADS



SC50.500502

5" METAL FLEX DIAMOND PAD AQUA - 30 GRIT
Aggressive cutting with gouging.



SC50.500503

5" METAL FLEX DIAMOND PAD GREY - 50 GRIT
Ideal for removing sealers and as a first cut on new concrete.



SC50.500504

5" METAL FLEX DIAMOND PAD BLACK - 100 GRIT
Ideal for removing sealers and as a first cut on new concrete.

NEED IMAGE

SC50.900901


5" RIGID BACKER PAD - 5/8" ARBOR
Preferred use with 5" Metal Flex Diamond Pads.

6" METAL FLEX DIAMOND PADS




SC60.500249

6" METAL FLEX DIAMOND PAD YELLOW - 16 GRIT
Very aggressive cutting with gouging. Ideally used on the SASE® Edge Pro 180.



SC60.500250

6" METAL FLEX DIAMOND PAD AQUA - 30 GRIT
Aggressive cutting without gouging. Ideally used on the SASE® Edge Pro 180.



SC60.500251

6" METAL FLEX DIAMOND PAD GREY - 50 GRIT
Ideal for removing sealers and as a first cut on new concrete. Ideally used on the SASE® Edge Pro 180.



SC60.500252

6" METAL FLEX DIAMOND PAD BLACK - 100 GRIT
Removes scratches left by Metal Flex 50 grit pads. Ideally used on the SASE® Edge Pro 180.