




# PT RESIN SERIES PUCKS




Don't waste time watching concrete dry after a wet application! The SASE® PT Resin Bond Series is specifically formulated to be used on damp floors directly after wet application steps. This eliminates down time waiting for the floor to completely dry saving time and labor costs. This series is also great for the final steps when polishing using power trowel equipment.

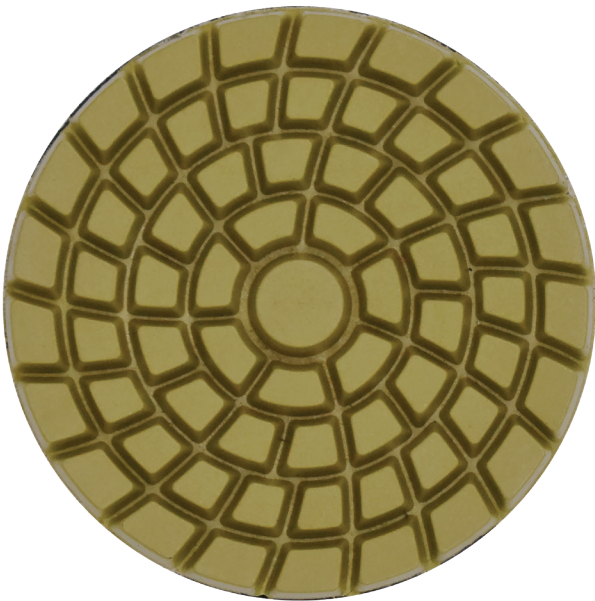

DRY USE



POLISH

	PRODUCT	APPLICATION	ITEM NO.
	<b>800 GRIT (WHITE)</b>	Can be the final step in polishing process after wet, floor grinding application or power trowel application when floor is damp and not fully dry leaving a high shine before applying guard / sealer.	<b>HOL.300755</b>
	<b>3000 GRIT (GREEN)</b>	Can be used as final step after PT Resin Bond Yellow - 1500 grit leaving the highest shine before applying guard / sealer.	<b>HOL.300757</b>
	<b>1500 GRIT (YELLOW)</b>	Can be used dry after PT Resin Bond White - 800 grit leaving a very high shine before applying guard / sealer.	<b>HOL.300756</b>