
TUNGSTEN CUTTERS SHAVERS & SCARIFIERS

SASE® Scarifier Cutters are used for surface preparation, concrete grinding applications for the removal of hard coatings.



MILLING CUTTERS

SASE® Milling Cutters are used for the removal of thick to thin mil coatings.

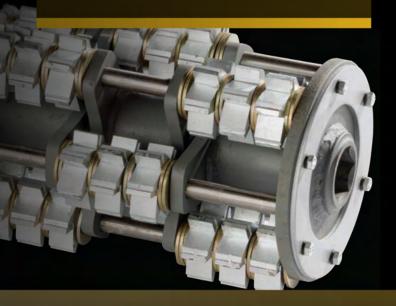

Products manufactured and marketed by SASE® Company are protected by patents issued or pending in the United States and other countries. SASE® Company reserves the right to change the specifications referred to in this literature at any time, without prior notice. © 2024 SASE® Company, Inc. All rights reserved.



SMALL 5 POINT 615.01.07

Outer Dia. Thickness Used with

16mm (5/8") 40mm (1 %16") 6mm (15/64") SC8E, FR200, FS200, CPM8, SPS8



SMALL 6 POINT

Used with

SC8E, FR200, FS200, CPM8, SPS8



MEDIUM 8 POINT

Used with

CPM10, SPS10



MEDIUM 8 POINT

615.08.30

Inner Dia Outer Dia. Thickness Used with

25.2 mm (63/64") 55.6mm (23/16") 6mm (15/64") RM320



LARGE 8 POINT 620.01.13

Inner Dia. Outer Dia. Thickness

30mm (1 3/16") 81mm (3³/16") 7.8mm (5/16") Used with SC12E, VA30S



LARGE 12 POINT

Outer Dia



LARGE 12 POINT



LARGE 12 POINT

630.03.13

Inner Dia. 33.02 mm (1 3/10") Outer Dia 80mm (3 %4") Thickness 7.84mm (5/16") Used with Truck Grinder



SMALL 615.01.11

Inner Dia. Outer Dia. Thickness Used with

16mm (5/8") 40mm (1 %16") 22.23mm (1/8") SC8E, FR200, FS200



Inner Dia

Outer Dia. SC10E, VA25S, CPM8, CPM10, SPS10



MEDIUM

Inner Dia. Used with

SC10E, VA25S, CPM8, CPM10, SPS10

LARGE THIN



LARGE 630.03.08

MEDIUM

Inner Dia Outer Dia. Thickness

29.5 mm (1 5/32") 80mm (3 %4") 40mm (1 %16") SC12E, VA30S



630.03.09

Outer Dia. Thickness Used with 29.5mm (1 5/32") 80mm (3 %4") 20mm (2 5/32") SC12E, VA30S. Truck Grinder

1-800-522-2606

SASEcompany.com

